LAMBTON DOORS
COMMERCIAL AND ARCHITECTURAL
DOOR MANUFACTURER

Tel. : 418.486.7401
Fax : 418.486.7381

Tel. (USA) : 1.800.363.2248
Tel. (CAN) : 1.800.463.3124
Fax (USA / CAN) : 1.800.561.7443

Commercial and Architectural Jambs

LAMBTON NON-RATED JAMB

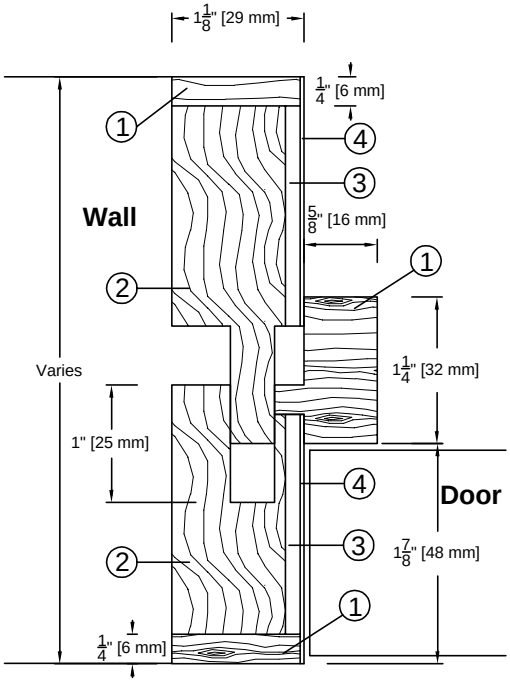

Split Jamb SJ-00

SPECIFICATIONS	DESCRIPTION
Wall Thickness	Minimum 4-7/8" (124 mm)
Wood Casing	By others
Maximum Opening	**Single:** 48" (1219 mm) x 120" (3048 mm) **Pair:** 96" (2438 mm) x 120" (3048 mm)
Assembly	Dado's pre-drilled and countersunk for #8 wood screw (Screws supplied by others)
Shipping	Knock down
Wrapping	Bundle wrapped
Suggested Rough Opening Dimensions	**For single or pair doors** Width : Interior opening of frame + 2-3/4" (70 mm) Height : Interior opening of frame + 1-3/8" (35 mm) (After Finished Floor) **Eg.** 36" x 84" interior opening (914 x 2134 mm) Rough opening should be : Width : 36" + 2-3/4" = 38-3/4" (984 mm) Height : 84" + 1-3/8" = 85-3/8" (2169 mm)

① Hardwood

② Structural Composite Lumber (SCL)

③ Crossband

④ Veneer

Printed in Canada 2005/05