



COMMERCIAL AND ARCHITECTURAL
DOOR MANUFACTURER

U.S.A. : 1 800 363.2248
Can. : 1 800 463.3124
sales@lambtondoors.com



COMMERCIAL AND ARCHITECTURAL DOORS




**Mineral core 45, 60 and
90 minute fire rating**

NO UREA FORMALDEHYDE

Blind edge 5-FD45/60/90-EBE

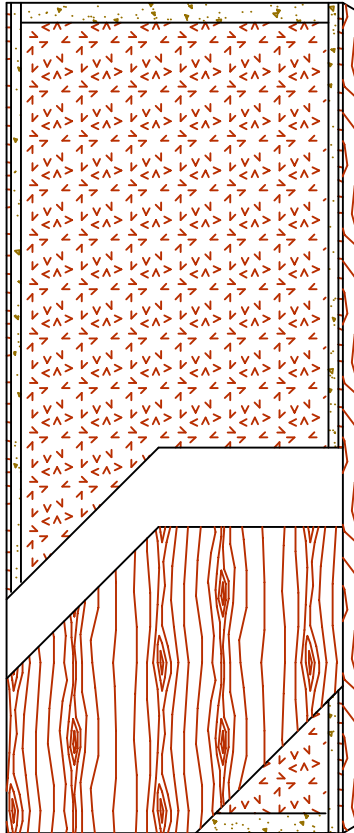

SPECIFICATIONS DESCRIPTION

Type	Mineral core (interior use).
In conformity with industry standards	ARCHITECTURAL WOODWORK STANDARDS-ED.1 W.D.M.A. SERIES I.S.1-A-2004 CSA 0132.2 SERIES 90
Thickness	1-3/4" (44 mm).
Maximum size	48" x 120" (1 219 mm x 3 048 mm).
Stiles	7/16" (11 mm) hardwood laminated to 1" (25 mm) proprietary material (FPCM*).
Rails	2" (51 mm) proprietary material (FPCM*).
Core	Non-combustible mineral core.
Adhesive	Type I (waterproof); PVA (no urea formaldehyde); VOC<0.683 g/L.
Face	Wood veneer bonded to a UF free composite crossband. No added urea formaldehyde resins.
Options	<ul style="list-style-type: none"> ● Neutral or positive pressure. ● Blocking for hardware. Refer to Fire Door Section of our Website for details.
Lite and louver opening	Cut-out for lite and louver with size limitations. Refer to Options Section of our Website for details.
Notes	Stile and rail dimensions shown are rough sizes, before trimming. Dimensions will vary due to prefit requirements.
Warranty	Life of original installation. See our complete warranty for details.
Factory finish	UV Finishing System. Stain or clearcoat finish available. Custom color matching available. Seal top and bottom standard. NO VOC.
Environmental description	Low Emitting Materials (LEED EQc4.4). 

* Fire Proof Composite Material

INFORMATION WWW.LAMBTONDOORS.COM

Printed in Canada 2009/10

