



**COMMERCIAL AND ARCHITECTURAL
DOOR MANUFACTURER**

**Tel. : (418) 486-7401
Fax : (418) 486-7381**


**Tel. (USA): 1 800 363-2248
Tel. (CAN): 1 800 463-3124
Fax (USA / CAN): 1 800 561-7443**

Commercial and Architectural Doors


LEAD LINED DOOR

**5-LSL-CE/ME-LL
7-LSL-CE/ME-LL**

Compatible or matching edge

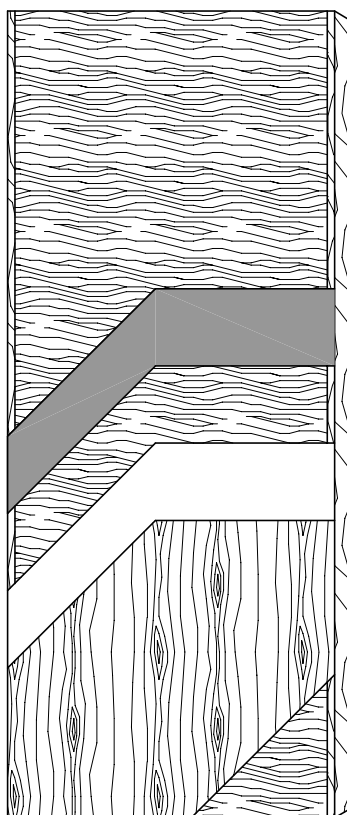

SPECIFICATION EXAMPLE

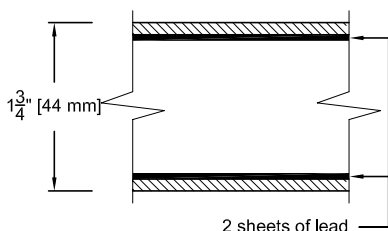

SPECIFICATIONS	DESCRIPTION
Type	Laminated strand lumber core (interior use).
In conformity with industry standards	A.W.I. / A.W.M.A.C. SECTION 1300 W.D.M.A. SERIES I.S.1 – A CSA 0132.2 SERIES 90
Thickness	1-3/4" (44 mm).
Maximum size	48" x 96" (1219 mm x 2438 mm).
Stiles	CE : 15/16" (24 mm) wood (mill option). ME : 15/16" (24 mm) hardwood.
Core	Structural composite lumber (SCL) with a density of 38 PCF (609 kg/m ³) bonded to the stiles. Conforms with ASTM D5456-01ae1
Adhesive	Type I (waterproof); PVA (no urea formaldehyde); VOC<0.683 g/L.
Face	Wood veneer or MDO bonded to a composite crossband.
Options	<ul style="list-style-type: none"> ● 20 minute rating (5 or 7-LSL-LL20). ● Neutral pressure, single swing only. ● Lead thickness available : 1/16" total or 1/8" total.
Lite opening	Maximum 1296 sq. in. (0.836 sq. m.). Non-rated : wood beads or metal kit model #115-L2. Rated : metal kit model #115-L1.
Notes	Available only with 2 sheets of lead : $2 \times \frac{1}{32}'' = \frac{1}{16}''$ or $2 \times \frac{1}{16}'' = \frac{1}{8}''$. Stile dimensions shown are rough sizes, before trimming. Dimensions will vary due to prefit requirements. Lambton Doors recommends the use of heavy duty hinges.
Warranty	Life of original installation. See our complete warranty for details.
Factory Finish	UV Finishing System. Stain, clearcoat, opaque and primed finish available. Custom color matching available. Seal top and bottom standard. VOC<0.444 g/L.



Visit www.lambtondoors.com for additional options and details.