





COMMERCIAL AND ARCHITECTURAL  
DOOR MANUFACTURER  
U.S.A. : 1 800 363.2248  
Can. : 1 800 463.3124  
info@lambtondoors.com

# COMMERCIAL AND ARCHITECTURAL DOORS




**Mineral core**  
**45 minute fire rating**  
**NO UREA FORMALDEHYDE**

Blind edge **5-FD45-EBE**

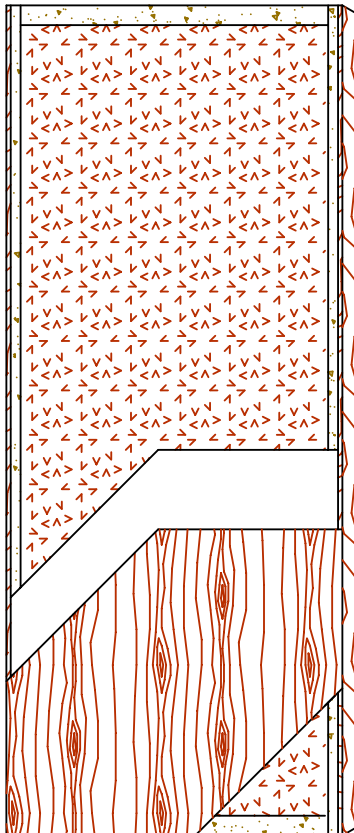

## SPECIFICATIONS DESCRIPTION

<b>Type</b>	Mineral core (interior use).
<b>In conformity with industry standards</b>	ARCHITECTURAL WOODWORK STANDARDS-ED.1 W.D.M.A. SERIES I.S.1-A-2004
<b>Thickness</b>	1-3/4" (44 mm).
<b>Maximum size</b>	48" x 120" (1 219 mm x 3 048 mm).
<b>Stiles</b>	7/16" (11 mm) hardwood laminated to 1" (25 mm) proprietary material (FPCM)*.
<b>Rails</b>	2" (51 mm) proprietary material (FPCM)*.
<b>Core</b>	Non-combustible mineral core.
<b>Adhesive</b>	Type I (waterproof); PVA (no urea formaldehyde); <b>VOC&lt;0.683 g/L.</b>
<b>Face</b>	Wood veneer bonded to a UF free composite crossband. <b>No added urea formaldehyde resin.</b>
<b>Options</b>	<ul style="list-style-type: none"> <li>● Neutral or positive pressure.</li> <li>● Blocking for hardware.</li> </ul> Refer to Fire Door Section of our website for details.
<b>Lite and louver opening</b>	Cut-out for lite and louver with size limitations. Refer to Options Section of our website for details.
<b>Notes</b>	Stile and rail dimensions shown are rough sizes, before trimming. Dimensions will vary due to prefit requirements.
<b>Warranty</b>	Life of original installation. See our complete warranty for details.
<b>Factory finish</b>	UV Finishing System. Stain and clearcoat finish available. Custom color matching available. Seal top and bottom standard. <b>NO VOC.</b>
<b>Environmental description</b>	Low Emitting Materials (LEED EQc4.4). 

\* Fire Proof Composite Material

## INFORMATION [www.lambtondoors.com](http://www.lambtondoors.com)

Printed in Canada 2010/12

