



COMMERCIAL AND ARCHITECTURAL
DOOR MANUFACTURER

U.S.A. : 1 800 363.2248
Can. : 1 800 463.3124
sales@lambtondoors.com

COMMERCIAL AND ARCHITECTURAL DOORS





Particleboard core
FSC CERTIFIED

NO UREA FORMALDEHYDE

Compatible edge **5-FSPC-ECE**

Matching edge **5-FSPC-EME**

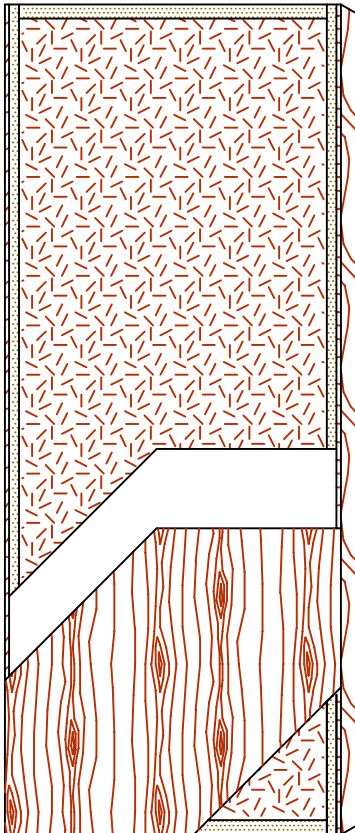

SPECIFICATIONS DESCRIPTION

Type	FSC Certified Particleboard Core (interior use).
In conformity with industry standards	ARCHITECTURAL WOODWORK STANDARDS-ED.1 W.D.M.A. SERIES I.S.1-A-2004 CSA 0132.2 SERIES 90 ASTM D5456-09 ANSI A208.1
Thickness	1-3/4" (44 mm).
Maximum size	48" x 120" (1219 mm x 3048 mm).
Stiles	ECE: 7/16" (11 mm) wood (mill option) laminated to 1" (25 mm) structural composite lumber (SCL). EME: 7/16" (11 mm) hardwood laminated to 1" (25 mm) structural composite lumber (SCL).
Rails	1-7/16" (36 mm) structural composite lumber (SCL).
Core	Particleboard core with a density of 32-36 PCF (513-577 kg/m ³) LD-2, bonded to stiles and rails. No added urea formaldehyde resins. 100% Pre-Consumer Recycled Content; FSC Certified.
Adhesive	Type I (waterproof); PVA (no urea formaldehyde); VOC<0.683 g/L.
Face	Wood veneer or MDO bonded to a UF free composite crossband. No added urea formaldehyde resins.
Option	20 minute rating neutral or positive pressure. Refer to Fire Door Section of our Website for details.
Lite and louver opening	Wood louvers not permitted in 20 minute labeled doors. Minimum 5" (127 mm) from stiles or rails. Minimum 1-1/2" (38 mm) from cut-out to cut-out. Refer to Options Section of our Website for details.

Notes Stile and rail dimensions shown are rough sizes, before trimming. Dimensions will vary due to prefit requirements. Also available in 8300 Series.

Warranty Life of original installation.
See our complete warranty for details.

Factory finish UV Finishing System. Stain, clearcoat, opaque and primed finish available. Custom color matching available. Seal top and bottom standard. **No VOC.**

Environmental description Recycled content (**LEED MRc4.1, 4.2**).
Certified Wood (**LEED MRc7**).
Low Emitting Materials (**LEED EQc4.4**).



The FSC logo identifies products which contain wood from well-managed forests certified in accordance with the rules of the Forest Stewardship Council.



INFORMATION WWW.LAMBTONDOORS.COM