





COMMERCIAL AND ARCHITECTURAL
DOOR MANUFACTURER

U.S.A. : 1 800 363.2248
Can. : 1 800 463.3124
sales@lambtondoors.com

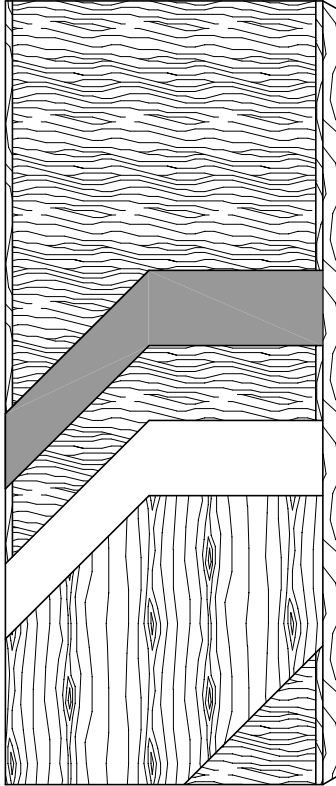

SPECIFICATION EXAMPLE

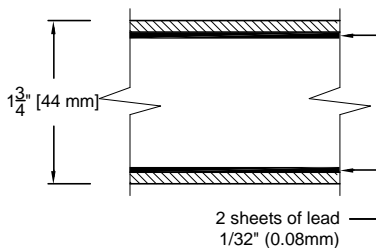

COMMERCIAL AND ARCHITECTURAL DOORS

Lead lined door

Compatible or matching edge **5-LSL-CE/ME-LL**
Compatible edge **7-LSL-CE-LL**

SPECIFICATIONS DESCRIPTION

Type	Laminated strand lumber core (interior use).
In conformity with industry standards	A.W.I. / A.W.M.A.C. SECTION 1300 W.D.M.A. SERIES I.S. 1A-04 CSA 0132.2 SERIES 90 ASTM D5456-01ae1
Thickness	1-3/4" (44 mm).
Maximum size	48" x 96" (1219 mm x 2438 mm).
Stiles	CE : 15/16" (24 mm) wood (mill option). ME : 15/16" (24 mm) hardwood.
Core	Structural composite lumber (SCL) with a density of 38 PCF (609 kg/m ³) bonded to the stiles.
Adhesive	Type I (waterproof); PVA (no urea formaldehyde); VOC<0.683 g/l.
Face	Wood veneer or MDO bonded to a composite crossband. Hardboard on 7 ply doors.
Options	<ul style="list-style-type: none"> • [5 or 7-LSL-LL20] 20 minute rating. • Neutral pressure, single swing only. • Lead thickness available : 1/16" total or 1/8" total.
Lite opening	<ul style="list-style-type: none"> • Maximum 1296 in² (0.836 m²). • Non-rated : wood beads or metal kit model #115-L2. • Rated : metal kit model #115-L1.
Notes	<ul style="list-style-type: none"> • Available only with 2 sheets of lead: 2 x 1/32" = 1/16" or 2 x 1/16" = 1/8". • Stile dimensions shown are rough sizes, before trimming. • Dimensions will vary due to prefit requirements. • Lambton Doors recommends the use of heavy duty hinges.
Warranty	Life of original installation. See our complete warranty for details.
Factory Finish	UV Finishing System. Stain, clearcoat, opaque and primed finish available. Custom color matching available. Seal top and bottom standard. VOC<0.444 g/l.

