



COMMERCIAL AND ARCHITECTURAL
DOOR MANUFACTURER


U.S.A. : 1 800 363.2248
Can. : 1 800 463.3124
info@lambtondoors.com

COMMERCIAL AND ARCHITECTURAL DOORS


Lead lined door

Compatible or matching edge **5-LSL-CE/ME-LL**

Compatible edge **7-LSL-CE-LL**

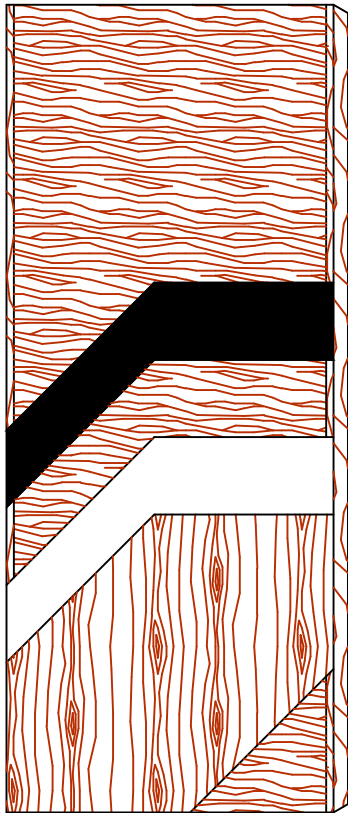

SPECIFICATION EXAMPLE

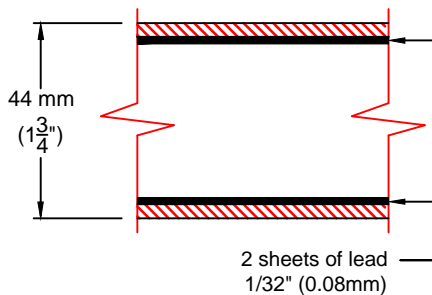

SPECIFICATIONS DESCRIPTION

Type	Laminated strand lumber core (interior use).
In conformity with industry standards	ARCHITECTURAL WOODWORK STANDARDS-ED. 1 W.D.M.A. SERIES I.S.1-A-2004 CSA 0132.2 SERIES 90 ASTM D5456-09
Thickness	1-3/4" (44 mm).
Maximum size	48" x 96" (1 219 mm x 2 438 mm).
Stiles	CE : 7/16" (11 mm) wood (mill option). ME : 7/16" (11 mm) hardwood.
Core	Structural composite lumber (SCL) with a density of 38 PCF (609 kg/m ³) bonded to the stiles.
Adhesive	Type I (waterproof); PVA (no urea formaldehyde); VOC<0.683 g/l.
Face	<ul style="list-style-type: none"> ● Wood veneer or MDO bonded to a composite crossband. ● Hardboard on 7 ply doors.
Options	<ul style="list-style-type: none"> ● [5 or 7-LSL-LL20] 20 minute rating. ● Neutral pressure, single swing only. ● Lead thickness available : 1/16" or 1/8" total.
Lite opening	Maximum 1 296 in ² (0.836 m ²). - Non-rated : wood beads or metal kit model #115-L2. - Rated : metal kit model #115-L1.
Notes	Available only with 2 sheets of lead: 2 x 1/32" (0,79 mm) = 1/16" (1,59 mm) total, or 2 x 1/16" (1,59 mm) = 1/8" (3,175 mm) total. Stile dimensions shown are rough sizes, before trimming. Dimensions will vary due to prefit requirements. Lambton Doors recommends the use of heavy duty hinges.
Warranty	Life of original installation. See our complete warranty for details.
Factory finish	UV Finishing System. Stain, clearcoat, opaque and primed finish available. Custom color matching available. Seal top and bottom standard. No VOC.

INFORMATION www.lambtondoors.com

