


LITE CUT OUT NEUTRAL PRESSURE

60 MINUTE (MINERAL CORE)

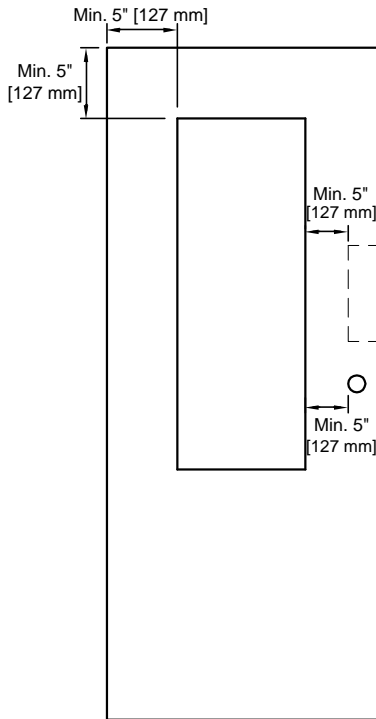

DOOR INFO

- Max. door size 4'-0" x 10'-0" [1219 mm x 3048 mm].
- Lite cut out to edge of door min. 5" [127 mm].
- Lite cut out to lite cut out min. 5" [127 mm].
- Lite cut out to hardware cut out min. 5" [127 mm].
- Lite cut out to bottom of door :
 - Up to 7'-0" [2134 mm] = 10" [254 mm].
 - Over 7'-0" [2134 mm] = 12" [305 mm].


LITE INFO

● USING LB7-90 BEADS

- Max. size 1296 sq. in. using Firelite.
- Max. size 100 sq. in. using 1/4" [6 mm] Wire glass.
- Multiple lites available if total does not exceed above mentioned dimensions.

● USING METAL LITE KIT #115

- Max. size 1920 sq. in. using Firelite & Silicon caulk.
- Max. size 1920 sq. in. using 1/4" [6 mm] Wire glass & Pemko FG 3000S90.
- Max. size 100 sq. in. using 1/4" [6 mm] Wire glass or Firelite only.

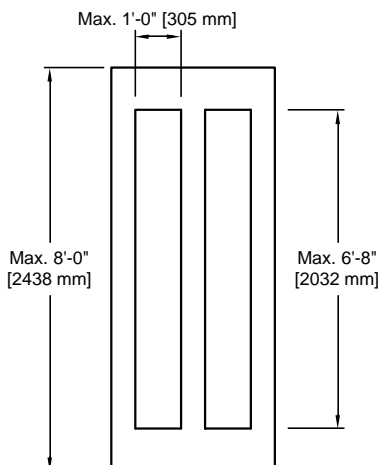

Max. visible glass area allowed is 12" wide x 80" high or 24" wide x 36" high with no lite larger than 960 sq. in.

Multiple vision lites are allowed, but the combined total visible glass area allowed is 1920 sq. in. per door.

Apply FG3000S90 to frame lip as shown.

Apply HSS2000 around perimeter of glass as shown, use labeled 1/4" wire glass.

