


LITE CUT OUT NEUTRAL PRESSURE

90 MINUTE (MINERAL CORE)

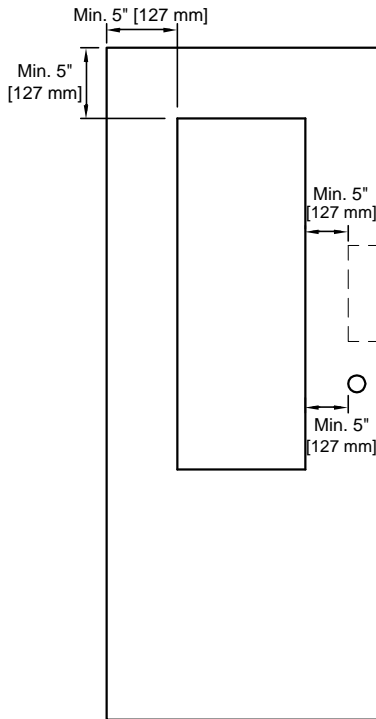

DOOR INFO

- Max. door size 4'-0" x 10'-0" [1219 mm x 3048 mm].
- Lite cut out to edge of door min. 5" [127 mm].
- Lite cut out to lite cut out min. 5" [127 mm].
- Lite cut out to hardware cut out min. 5" [127 mm].
- Lite cut out to bottom of door :
 - Up to 7'-0" [2134 mm] = 10" [254 mm].
 - Over 7'-0" [2134 mm] = 12" [305 mm].


LITE INFO

● USING LB7-90 BEADS

- Max. size 1296 sq. in. using Firelite.
- Max. size 100 sq. in. using 1/4" [6 mm] Wire glass.
- Multiple lites available if total does not exceed above mentioned dimensions.

● USING METAL LITE KIT #115

- Max. size 2208 sq. in. using Firelite & Silicon caulk.
- Max. size 2208 sq. in. using 1/4" [6 mm] Wire glass & Pemko FG 3000S90.
- Max. size 100 sq. in. using 1/4" [6 mm] Wire glass or Firelite only.

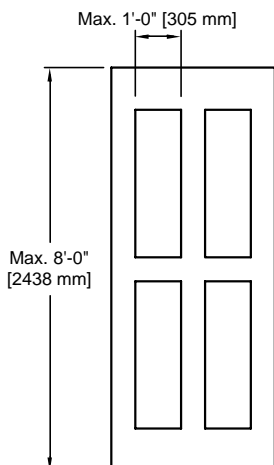

Max. visible glass area allowed is 12" wide x 46" high or 552 sq. in. per vision lite.

Multiple vision lites are allowed, but the total number must not exceed 4 per door. The largest approved configuration is four (4) 12" x 46" lites (as shown left). The combined total visible lite area allowed is 2208 sq. in. per door.

Apply FG3000S90 to frame lip as shown.

Apply HSS2000 around perimeter of glass as shown, use labeled 1/4" wire glass.

