




COMMERCIAL AND AACHITECTURAL Door manufacturer

U.S.A.: 1 800 363.2248 Can.: 1 800 463.3124 info@lambtondoors.com



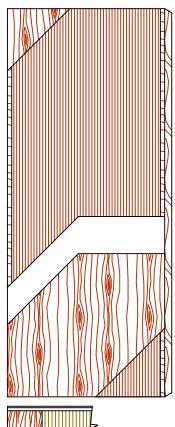







The FSC logo identifies products which contain wood from well-managed forests certified in accordance with the rules of the Forest Stewardship Council.





COMMERCIAL AND ARCHITECTURAL DOORS

Laminated Veneer Lumber Core (LVL)

Standard Series EnviroDesign™ Series

Enviro**Design**

5-LVL-CE/ME/BE 5-UFLVL-ECE/EME/EBE 5-FSLVL-ECE/EME/EBE

SPECIFICATIONS	DESCRIPTIONS	
Туре	Laminated Veneer Lumber Core (interior use).	
In Conformity with Industry Standards	ARCHITECTURAL WOODWORK STANDARDS-ED. 2 W.D.M.A. SERIES I.S.1-A-2013 CSA 0132.2 SERIES 90 ASTM D5456-09	
Thicknesses	1-3/4" (44 mm).	
Maximum Sizes	48" x 120" (1 219 mm x 3 048 mm).	
Stiles	ME (Matching Edge): 1	15/16" (24 mm) wood (mill option). 15/16" (24 mm) hardwood. 15/16" (24 mm) hardwood.
Core	Piece of laminated wood veneer strips of 1/8" (3 mm) each. These strips are longitudinally laminated by hot pressing (LVL).	
Adhesive	Type I (waterproof); PVA (UF-Free); VOC<0.683 g/L.	
Face	Wood veneer, MDO or HPDL laminated to a HDF.	
Options	UF-Free faces. PE (Plastic Edge): HPDL edges. Lambton Doors' EDGEFENDER: High impact resistant edges.	
Lite and Louver	Minimum 5" (127 mm) from stiles or rails . Minimum 1-1/2" (38 mm) from cut-out to cut-out .	
Openings	` ,	
Openings Notes	Minimum 1-1/2" (38 mm) fr	
<u> </u>	Minimum 1-1/2" (38 mm) fr	rom cut-out to cut-out.
Notes	Minimum 1-1/2" (38 mm) fr Stile and rail dimensions sh Life of original installation. UV Finishing System 9 by primed finish available. Cu Sealed top and bottom star	hown are rough sizes, before trimming. AWI. Stain, clearcoat, opaque and ustom color matching available. No VOC.

Printed in Canada 2015/12