





**5 PLY DOOR  
Standard Series  
5-PC-ME/CE/BE**

The 5 ply door PC, with a particleboard core, is an interior wood door of high-quality and with added value developed and manufactured for the high-end residential, commercial, architectural and institutional markets.

**VALIDATED ECO-DECLARATION**

**Product's contribution to LEED® v4**

©Copyright 2016 Vertima inc.

PRODUCT SPECIFICATIONS	ENVIRONMENTAL IMPACTS	TECHNICAL PERFORMANCES
<p><b>References</b> Particleboard Core (PC): 5-PC-ME, 5-PC-CE, 5-PC-BE.</p> <p><b>Final manufacturing location</b> Lambton, Quebec G0M 1H0 CANADA</p> <p><b>Composition</b> Particleboard core, HDF, SCL, veneer, hardwood edges, adhesives, UV finishes.</p>	<p><b>Life Cycle Assessment</b> April 2017</p> <p><b>Product's carbon footprint</b> April 2017</p> <p><b>Environmental Product Declaration</b> Product-specific, Type III December 2017 - ISO 14025:2006 December 2022</p>	<p><b>Performance tests</b> Architectural Woodwork Standards, WDMA Series I.S.1-A, ASTM D5456, ANSI A208.1.</p> <p><b>Expected life</b> 40 years</p>
ATTRIBUTES	INGREDIENTS AND EMISSIONS	MANUFACTURER'S ENVIRONMENTAL MANAGEMENT
<p><b>Recycled content</b> Pre-consumer: 68.3% Post-consumer: 0%</p> <p><b>Sourcing of raw materials</b> The origin and extraction locations have been documented for 79.4% of raw materials used in manufacturing in the final product, based on weight ratio.</p> <p><b>FSC® Certification</b> RA-COC-001082 (FSC®-Certified door models: 5-FSPC)</p> <p><b>Rapidly renewable materials</b> -</p> <p><b>Biobased materials</b> -</p>	<p><b>Declaration of chemical ingredients</b> 1,000 ppm</p> <p><b>Type of declaration</b> HDP® version 2.0 Health Product Declaration®</p> <p><b>Emission test</b> -</p> <p><b>VOCs</b> (Factory-applied finishes) See page 6</p> <p><b>Formaldehyde</b> (Door models with No Added Formaldehyde: 5-UFPC) CARB Phase 2</p> <p><b>Others</b> -</p>	<p><b>ISO 14001 Certification</b> -</p> <p><b>Extended Producer Responsibility</b> (Take Back Program) -</p> <p><b>Corporate Sustainability Report</b> (CSR: GRI, ISO 26000, BNQ 21000 or others) -</p>
		CERTIFICATIONS AND CONFORMITIES
		   

The FSC® logo enables to identify products containing wood from forests responsibly managed and certified against the Forest Stewardship Council® standards.

The mission of LAMBTON DOORS is to develop and manufacture high-quality, value-added interior wood doors and frames for the North American commercial, architectural and institutional markets.

235, 2<sup>nd</sup> Avenue, Lambton, Quebec G0M 1H0 CANADA  
[www.lambtondoors.com](http://www.lambtondoors.com)

MasterFormat®: **08 14 16**  
Validated Eco-Declaration:  
**VED17-1066-01**  
Original issue date: **2017/08**  
Period of validity: **2018/01 to 2019/01**



# ENVIRONMENTAL DATA SHEET

DOOR 5-PC-ME/CE/BE



### Thicknesses

35 mm (1-3/8"); non-rated  
44 mm (1-3/4") to 57 mm (2-1/4"); 20 minutes

### Sizes

1219 mm x 3048 mm (48"x120"); non-rated  
1219 mm x 3048 mm (48"x120"); neutral pressure  
1219 mm x 2743 mm (48"x108"); positive pressure

### Options

EDGEFENDER: Impact-resistant door edge protector  
ASEPTI: Antimicrobial coated surfaces option

**Veneer and edges available in various wood species**

## ATTRIBUTES

### RECYCLED CONTENT

Final product	Weight ratio	Pre-consumer	Post-consumer
Door 5-PC-ME/CE/BE	100%	68.3%	0%
Components (with recycled content)	Weight ratio	Pre-consumer	Post-consumer
Particleboard core	64.3%	80.0%	0%
HDF	22.4%	75.0%	0%

Validated Eco-Declaration – Recycled Content

Methodology: on-site audit, supply chain evaluation, analysis and validation of the recycled content data according to the weight ratio of each of the components used in manufacturing the final product.

Vertima's procedure: VERT-032008-01, Second Edition.

### SOURCING OF RAW MATERIALS

Weight ratio	Final manufacturing location
100%	Lambton, Quebec G0M 1H0 CANADA

Validated Eco-Declaration – Sourcing of raw materials

Methodology: on-site audit, supply chain evaluation, analysis and validation of the sourcing of raw materials data according to the weight ratio of each of the components used in manufacturing the final product.

Vertima's procedure: VERT-032008-02, Second Edition.

Components	Weight ratio	Extraction locations	Transportation
Particleboard core (wood)	51.5%	Canada (Quebec, New Brunswick)	Road
Particleboard core (other ingredients)	12.9%	N/A	N/A
HDF (wood)	16.8%	United States (WA, ID, MT)	Train, road
HDF (other ingredients)	5.6%	N/A	N/A
Stiles and rails, SCL (wood)	5.9%	United States (OK, AR, TX)	Road
Stiles and rails, SCL (other ingredients)	2.2%	N/A	N/A
Veneer	2.7%	Canada, United States, International	Boat, road
Hardwood edges	2.5%	Canada, United States	Road
Adhesives and UV finishes	Negligible	N/A	N/A

The origin and extraction locations have been documented for 79.4% of raw materials used in manufacturing in the final product, based on weight ratio.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, in all or in part, caused by errors and omissions relative to the data collection, compilation and/or interpretation. The analysis protocol used by Vertima is available on request.


Copyright© 2016 by Vertima inc.

Validated Eco-Declaration:  
**VED17-1066-01**  
Period of validity:  
**2018/01 to 2019/01**



## ATTRIBUTES (CONTINUED)

### SOURCING OF RAW MATERIALS (CONTINUED)

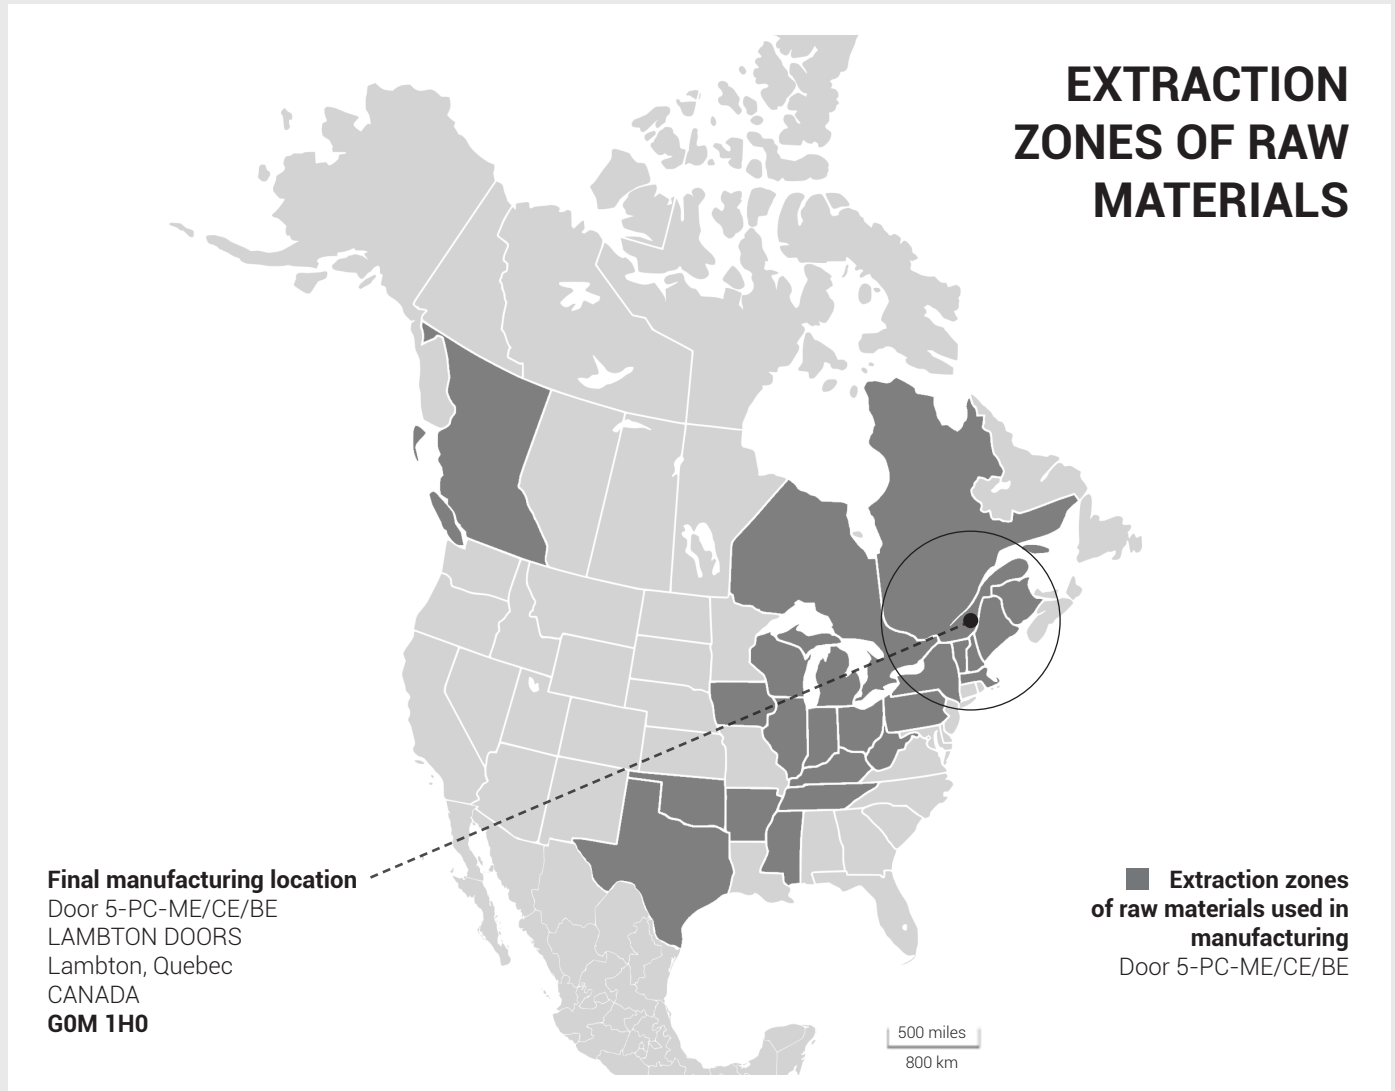

#### 1. HARVEST LOCATIONS OF WOOD:

- **PARTICLEBOARD CORE - Canada:** Quebec, New Brunswick.
- **HDF - United States:** Idaho, Montana, Washington.
- **STILES AND RAILS (SCL) - United States:** Oklahoma, Arkansas, Texas.
- **VENEER (Tropical wood) - Africa:** Ghana, Cameroon, Gabon, Congo (not shown on map); **South America:** Brazil (not shown on map).
- **VENEER - Canada:** Ontario, Quebec, British Columbia; **United States:** NY, MI, PA, OH, WV, IN, KY, MS, TN, IA, VT, WI, IL, MA;  
**Europe:** Croatia, Estonia, Romania, Slovenia, Czech Republic (not shown on map).
- **HARDWOOD EDGES - Canada:** Ontario, Quebec, New Brunswick; **United States:** NY, PA, OH, VT, NH, ME.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, in all or in part, caused by errors and omissions relative to the data collection, compilation and/or interpretation. The analysis protocol used by Vertima is available on request.

Copyright© 2016 by Vertima inc.


Validated Eco-Declaration:  
**VED17-1066-01**  
Period of validity:  
**2018/01 to 2019/01**



### ATTRIBUTES (CONTINUED)

#### FSC® CERTIFICATION

The standard door model 5-PC-ME/CE/BE is not FSC®-Certified. However, LAMBTON DOORS offers the FSC® certification for the 5-FSPC-EME/ECE/EBE. Contact LAMBTON DOORS for more details.

 <p><b>FSC</b> www.fsc.org FSC® C001968</p> <p>The mark of responsible forestry</p>	Door 5-PC-ME/CE/BE	% Wood components	% FSC®-Certified wood by volume	% calculated according to total volume of wood components used in the product final assembly versus the total volume of FSC®-Certified wood
	Wood	100%	0%	0%
	LAMBTON DOORS	Certification number	Type of certification	Period of validity
	Lambton, QC CANADA	RA-COC-001082	FSC® MIX	2013/09/20 to 2018/09/19

Validated Eco-Declaration – FSC® Certification

Methodology: on-site audit, supply chain evaluation and validation of FSC® certification documents confirming the type of certification and calculation, based on FSC®-Certified wood weight ratio in the final product.

Vertima's procedure: VERT-032008-03, Second Edition.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, in all or in part, caused by errors and omissions relative to the data collection, compilation and/or interpretation. The analysis protocol used by Vertima is available on request.

Copyright® 2016 by Vertima inc.

Validated Eco-Declaration:  
**VED17-1066-01**  
Period of validity:  
**2018/01 to 2019/01**



# ENVIRONMENTAL DATA SHEET

DOOR 5-PC-ME/CE/BE

## ENVIRONMENTAL IMPACTS

### ENVIRONMENTAL PRODUCT DECLARATION (EPD)

Product-specific EPD, ISO 14025:2006, Type III

The door model 5-PC-ME/CE/BE has an EPD that was prepared by Vertima. FPInnovations is the program operator. The life cycle assessment, verified by a third party and on which is based this EPD, has been done by the Renewable Materials Research Center (CRMR) of Université Laval, Quebec City (Quebec) in 2014 for LAMBTON DOORS.

**Reference PCR** FPInnovations. 2013. Product Category Rules. North American structural and architectural wood products. Version 1.1. 22pp.

Functional Unit (FU)	Scope of the LCA	Reference service life	Period of validity
Closure and separation of 2 rooms with a door of 7 ft x 3 ft (thickness: 1-3/4 in)	Cradle-to-grave	60 years (building) 40 years (product)	December 2017 - December 2022

### Table of environmental impacts for the door 5-PC-ME/CE/BE (dimensions: 7 ft x 3 ft x 1-3/4 in)

Impact categories	Unit	Results per FU 5-PC-ME/CE	Results per FU 5-PC-BE
Global warming potential	kg CO <sub>2</sub> eq	-17.8	-17.8
Ozone depletion potential	kg CFC-11 eq	1.29.10 <sup>-5</sup>	1.29.10 <sup>-5</sup>
Acidification potential	kg SO <sub>2</sub> eq	0.473	0.473
Smog creation potential	kg O <sub>3</sub> eq	9.38	9.38
Eutrophication potential	kg N eq	0.983	0.983

Consumption of total primary energy	Unit	Results per FU 5-PC-ME/CE	Results per FU 5-PC-BE
Non-renewable fossil	MJ	1,482	1,482
Non-renewable nuclear	MJ	98.07	98.75

Type III Environmental Product Declaration developed in accordance with ISO 14025:2006

Source: EPD report

Validated Eco-Declaration – Environmental Product Declaration (EPD)  
Methodology: validation of documents and methodology surrounding the product LCA report and EPD.  
Vertima's procedure: VERT-032010-03, Second Edition.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, in all or in part, caused by errors and omissions relative to the data collection, compilation and/or interpretation. The analysis protocol used by Vertima is available on request.

Copyright© 2016 by Vertima inc.

Validated Eco-Declaration:  
**VED17-1066-01**  
Period of validity:  
**2018/01 to 2019/01**



### INGREDIENTS AND EMISSIONS

#### DECLARATION OF CHEMICAL INGREDIENTS



**Type of declaration:** Health Product Declaration® (HPD®) version 2.0

**Period of validity:** December 1st 2016 to December 1st 2019

Summary of product contents and results from screening individual chemical substances against HPD Priority Lists<sup>1</sup> and the GreenScreen for Safer Chemicals®.<sup>2</sup>

**Health Product Declaration® URL:** <http://www.hpd-collaborative.org/hpd-public-repository/>

The Health Product Declaration® and logo is owned by the Health Product Declaration® Collaborative and is used with permission.

**Declaration:** Prepared by Vertima  Self-declared  Third party

**Ingredients inventory threshold:** 1,000 ppm

**Full disclosure of intentional ingredients:** Yes

**Full disclosure of known hazards:** Yes

#### Hazards associated with the product ingredients:

This HPD Standard describes a declaration of product content and direct health hazards associated with exposure to its individual contents. The Declaration is not an assessment of risks associated with actual use of the product. It does not address the potential health impacts of substances used or created during manufacture that do not appear in the final product as residuals, nor substances created during combustion or other degradation processes.

**Highest concern GreenScreen® Benchmark:** List Translator Likely Benchmark 1<sup>3</sup>

- |   |  |   |
|---|--|---|
| <input type="checkbox"/> PBT (Persistent, Bioaccumulative, Toxic) | <input checked="" type="checkbox"/> Respiratory      | <input checked="" type="checkbox"/> Physical hazard |
| <input checked="" type="checkbox"/> Cancer                        | <input type="checkbox"/> Neurotoxicity               | <input type="checkbox"/> Global warming             |
| <input checked="" type="checkbox"/> Gene Mutation                 | <input checked="" type="checkbox"/> Mammal           | <input type="checkbox"/> Ozone depletion            |
| <input type="checkbox"/> Development                              | <input checked="" type="checkbox"/> Skin or eye      | <input checked="" type="checkbox"/> Multiple        |
| <input checked="" type="checkbox"/> Reproductive                  | <input checked="" type="checkbox"/> Aquatic toxicity | <input type="checkbox"/> Unknown                    |
| <input checked="" type="checkbox"/> Endocrine                     | <input type="checkbox"/> Land toxicity               |   |

<sup>1</sup>Please refer to Annex D of HPD® Open Standard Version 2.0, September 10th 2015. <http://www.hpd-collaborative.org>

<sup>2</sup>GreenScreen for Safer Chemicals® method: <http://www.greenscreenchemicals.org/>

<sup>3</sup>GreenScreen (GS) Benchmark scores of chemical ingredients: Benchmark 1 (Avoid, chemical of high concern), Benchmark 2 (Use but search for safer substitutes), Benchmark 3 (Use but still opportunity for improvement), Benchmark 4 (Prefer, safer chemical).

#### TABLE OF INGREDIENTS

Name	Role	Weight ratio	CAS <sup>1</sup>	GreenScreen® <sup>2</sup>	Note(s) (for more details refer to the HPD®)
Particleboard	Core	64.3%	64742-61-6 50-00-0	LT-1	LT-P1, LT-UNK and BM-4 scores also present
HDF	Crossband	22.4%	64742-61-6 50-00-0	LT-1	LT-UNK scores also present
SCL	Stiles and rails	8.1%	9016-87-9 8002-74-2	LT-UNK	-
Veneer	Finishing	2.7%	-	-	-
Hardwood edges	Finishing	2.5%	-	-	-
Adhesives	Assembly	0.1% - 1.0%	108-05-4	LT-P1	LT-UNK scores also present
UV finishes	Finishing	0.1% - 1.0%	14808-60-7	LT-1	LT-P1 and LT-UNK scores also present

<sup>1</sup>Only the CAS numbers with the score of highest concern are listed. The complete list of substances can be found in the HPD®.

<sup>2</sup>GS List Translator (LT) scores of chemical ingredients: LT-1, likely GS Benchmark 1; LT-P1, possible GS Benchmark 1; LT-U or LT-UNK, present on GS Specified Lists but there is insufficient information to classify the hazards as LT-1 or LT-P1 (does not mean the chemical is safe).

Validated Eco-Declaration – Declaration of chemical ingredients

Methodology: validation of the documentation confirming the methodology and reporting of chemical ingredients.

Vertima's procedure: VERT-032009-01, Second Edition.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, in all or in part, caused by errors and omissions relative to the data collection, compilation and/or interpretation. The analysis protocol used by Vertima is available on request.

Copyright© 2016 by Vertima inc.

Validated Eco-Declaration:  
**VED17-1066-01**  
Period of validity:  
**2018/01 to 2019/01**



# ENVIRONMENTAL DATA SHEET

DOOR 5-PC-ME/CE/BE

## INGREDIENTS AND EMISSIONS

### VOLATILE ORGANIC COMPOUNDS (VOCs)

All adhesives and finishes are applied during the manufacturing of the door 5-PC-ME/CE/BE. In each category of products presented below, the value refers to the VOC content of adhesives and finishes in their liquid state.

#### ADHESIVES

Manufacturer	Products	VOC content
Dural Division of Multibond Inc.	Different Polyvinyl Acetate (PVAc) based adhesives	1.5 g/L - 24.0 g/L

#### FINISHES

Manufacturer	Products	VOC content
Can-Lak Inc.	Different UV curable finishes, 100% solid	6.1 g/L - 20.8 g/L

Validated Eco-Declaration – Emissions and Volatile Organic Compounds (VOCs)  
Methodology: validation of documents attesting VOCs emissions.  
Vertima's procedure: VERT-032009-02, Second Edition.

### FORMALDEHYDE

Product Components	Conformity
Particleboard core	CARB Phase 2
Crossband HDF	CARB Phase 2
Stiles and rails, SCL	CARB Exempt

Validated Eco-Declaration – Emissions and formaldehyde  
Methodology: validation of the documents attesting the methodology and results of emissions general evaluation and formaldehyde.  
Vertima's procedure: VERT-032009-02, Second Edition.

## TECHNICAL PERFORMANCES

### PERFORMANCE TESTS

LAMBTON DOORS' products are made in conformance with industrial standards:

- Architectural Woodwork Standards: Standards for fabrication, finishing and installation of architectural woodwork;
- WDMA Series I.S. 1-A: Standard for Windows and Doors Manufacturers;
- ASTM D5456: Standard Specification for Evaluation of Structural Composite Lumber Products;
- ANSI A208.1: Standard for particleboards.

Fire resistance:

- Up to 20 minutes neutral or positive pressure;
- CAN/ULC S104: Standard Method for Fire Tests of Door Assemblies;
- NFPA 252: Standard Method of Fire Tests of Door Assemblies;
- UL 10B: Standard for Fire Tests of Door Assemblies;
- UL 10C: Standard for Positive Pressure Fire Tests of Door Assemblies (Category B, Category A optional).

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, in all or in part, caused by errors and omissions relative to the data collection, compilation and/or interpretation. The analysis protocol used by Vertima is available on request.

Copyright© 2016 by Vertima inc.

Validated Eco-Declaration:  
**VED17-1066-01**  
Period of validity:  
**2018/01 to 2019/01**



# ENVIRONMENTAL DATA SHEET

DOOR 5-PC-ME/CE/BE

## TECHNICAL PERFORMANCES (CONTINUED)

### WARRANTY

All LAMBTON DOORS wood doors and frames carry a lifetime warranty against warp and show-through.

## MANUFACTURER'S ENVIRONMENTAL MANAGEMENT PROGRAM

### MANUFACTURER'S COMMITMENT

Since the late 1990s, LAMBTON DOORS has been committed to the environmental movement. We are compelled to act in an eco-friendly way because we believe in a transformed construction industry environment that contributes to a sustainable future. Today, the company's sound environmental management dictates our choice of suppliers, manufacturing process development and equipment acquisition, as well as the treatment of our plant residue. It also explains our use of a sophisticated eco-friendly finishing system that supports the vitality of the environment.

Each of our actions is aimed at preserving the health of our planet and that of our plant workers, field workers and end users. Several of our products, including those in our EnviroDesign™ Series with Ultra-Low Emitting Formaldehyde Resins (ULEF) or No-Added Formaldehyde (NAF), contribute to the points score in various product categories leading to LEED® certification.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, in all or in part, caused by errors and omissions relative to the data collection, compilation and/or interpretation. The analysis protocol used by Vertima is available on request.

Copyright© 2016 by Vertima inc.

Validated Eco-Declaration:  
**VED17-1066-01**  
Period of validity:  
**2018/01 to 2019/01**





# ENVIRONMENTAL DATA SHEET

DOOR 5-PC-ME/CE/BE

## PRODUCT CONTRIBUTION SUMMARY

### LEED® v4 requirements for Building Design + Construction (BD+C)

New Construction, Core and Shell, School, Retail, Data Centers, Warehouse and Distribution Centers, Hospitality and Healthcare.

### LEED® v4 requirements for Interior Design + Construction (ID+C)

Commercial Interiors, Retail and Hospitality.

MATERIALS AND RESOURCES		PRODUCT CONTRIBUTIONS	
MR	<b>Building Product Disclosure and Optimization – Environmental Product Declaration (EPD)</b> Option 1: Environmental Product Declaration (1 point) The door 5-PC-ME/CE/BE contributes to this credit due to the availability of a product-specific EPD (Type III) and is valued as 1 whole product out of the 20 needed for the purposes of credit achievement calculation.	Contribute	<b>ENVIRONMENTAL IMPACTS</b>  Product-specific EPD (Type III) compliant to ISO 14025:2006.  The EPD is based on a cradle-to-grave LCA for a building service life of 60 years. Therefore, it could be used in the calculations for the obtention of credit «MR - Building Life-Cycle Impact Reduction» with Option 4 «Whole-Building Life-Cycle Assessment».
			<b>ATTRIBUTES</b>  Recycled Content Pre-consumer (68.3%) Post-consumer (0%)
			<b>INGREDIENTS AND EMISSIONS</b>  HPD® version 2.0 Health Product Declaration®
MR	<b>Building Product Disclosure and Optimization – Sourcing of Raw Materials</b> Option 2: Leadership extraction practices (1 point) May also contribute to the location valuation factor if the product is sourced (extracted, manufactured, purchased) within 160 km of the project site.	Contribute	<b>ATTRIBUTES</b>  Recycled Content Pre-consumer (68.3%) Post-consumer (0%)
			<b>INGREDIENTS AND EMISSIONS</b>  HPD® version 2.0 Health Product Declaration®
			<b>INGREDIENTS AND EMISSIONS</b>  HPD® version 2.0 Health Product Declaration®
MR	<b>Building Product Disclosure and Optimization – Material Ingredients</b> Option 1: Material ingredients reporting (1 point) The door 5-PC-ME/CE/BE contributes to this credit due to the availability of Health Product Declarations® and is valued as 1 whole product out of the 20 needed for the purposes of credit achievement calculation.	Contribute	<b>INGREDIENTS AND EMISSIONS</b>  HPD® version 2.0 Health Product Declaration®
			<b>INGREDIENTS AND EMISSIONS</b>  HPD® version 2.0 Health Product Declaration®
			<b>INGREDIENTS AND EMISSIONS</b>  HPD® version 2.0 Health Product Declaration®
INDOOR ENVIRONMENTAL QUALITY		PRODUCT CONTRIBUTIONS	
EQ	<b>Low-Emitting Materials</b> Option 1: Product category calculation (1 - 3 points) Number of points is dependent on the LEED® rating system and the number of compliant categories.	Do not contribute <sup>1</sup>	<b>INGREDIENTS AND EMISSIONS</b>  <sup>1</sup> Must be tested and determined compliant to the standard method of the California Department of Public Health (CDPH) v1.1-2010.  LAMBTON DOORS provides composite wood panels compliant to CARB Phase 2 for all standard doors.
			<b>INGREDIENTS AND EMISSIONS</b>  HPD® version 2.0 Health Product Declaration®
			<b>INGREDIENTS AND EMISSIONS</b>  HPD® version 2.0 Health Product Declaration®

It is important to consider that the total amount of possible points reflects the number of achievable points in each credit category. The product itself cannot achieve this score, as defined above, but is considered as a beneficial element in order to achieve LEED® credits.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, in all or in part, caused by errors and omissions relative to the data collection, compilation and/or interpretation. The analysis protocol used by Vertima is available on request.



# ENVIRONMENTAL DATA SHEET

DOOR 5-PC-ME/CE/BE

## PRODUCT CONTRIBUTION SUMMARY (CONTINUED)

### LEED® v4 requirements for homes

Applies to single family homes, multi-family (one to three stories), or multi-family (four to six stories). Includes homes and multifamily low-rise and multi-family mid-rise.

MATERIALS AND RESOURCES		PRODUCT CONTRIBUTIONS	
<b>MR Prereq 1</b>	<b>Certified Tropical Wood</b>	<b>Contribute</b>	<b>ATTRIBUTES</b> The door 5-PC-ME/CE/BE is available with non-tropical wood species.
<b>MR Credit 2</b>	<b>Environmentally Preferable Products</b> Maximum of 4 points depending on both options in the context of each project.  Option 2: Environmentally Preferable Products <sup>2</sup> The door 5-PC-ME/CE/BE meets at least 1 criterion for this option since the product contains 68.3% of pre-consumer recycled content and is FSC®-Certified when specified.  The final product should contain at least 25% of post-consumer recycled content or 50% of pre-consumer recycled content.  Wood products must be FSC®-Certified, or USGBC-approved equivalent.	<b>Contribute<sup>2</sup></b>	<b>ATTRIBUTES</b>  Recycled Content Pre-consumer (68.3%) Post-consumer (0%)
INDOOR ENVIRONMENTAL QUALITY		PRODUCT CONTRIBUTIONS	
<b>EQ Credit 7</b>	<b>Low-Emitting Products (0.5 - 3 points)</b> At least 90% of all materials in each category must meet credit requirements.	<b>Do not contribute<sup>3</sup></b>	<b>INGREDIENTS AND EMISSIONS</b>  <sup>3</sup> Must be tested and determined compliant to the standard method of the California Department of Public Health (CDPH) v1.1-2010.  LAMBTON DOORS provides composite wood panels compliant to CARB Phase 2 for all standard doors.

It is important to consider that the total amount of possible points reflects the number of achievable points in each credit category. The product itself cannot achieve this score, as defined above, but is considered as a beneficial element in order to achieve LEED® credits.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, in all or in part, caused by errors and omissions relative to the data collection, compilation and/or interpretation. The analysis protocol used by Vertima is available on request.

