

MODELS		5 HC8300-CE/ME/BE 5 UFHC8300-ECE-EME-EBE
DIMENSIONS	Thickness	1 3/8" - 1 3/4" 35 mm - 44 mm
	Single Doors	48" x 108" 1219mm x 2743mm
	Standard Pairs Double egress Pairs	96" x 108" 2438mm x 2743mm
CONSTRUCTION	Surface Material	Placage de bois, MDO, HPDL
	Crossbands	HDF
	Vertical Edges (Stiles)	7/16" (11 mm) Hardwood Laminated to 4" (102 mm) Structural Composite Lumber (SCL)
	Horizontal Edges (Rails)	3" (76 mm) Structural Composite Lumber (SCL)
	Face and core assembly adhesive	Type 1 (résistant à l'eau); PVA (sans urée-formaldéhyde)
	Core Construction	Âme creuse (option manufacturier)
STC	Acoustic Rating	Non
CREDITS & STANDARD	Environmental Options	CDPH compliant, ULEF/NAF *Upon request
	Environmental Product Declaration	Yes
	Quality Standards	AWS-ED.2, NAAWS 4.0, WDMA Series I.S.1-A-2021
	WDMA Performance Duty Level	Usage intensif
	Label Agency	



LAMBTON
Doors

ARCHITECTURAL WOOD DOORS AND FRAMES

NON COUPE-FEU

Lite openings / Louvers

N/A

OPTIONS

**Distance from Cut out to Cut out
Distance from Lock and Lite Cutouts**

Machining

Machining preparation per hardware manufacturer's templates

Factory Finish


**UV Finishing System 9 by AWI, No VOC
Clear, Standard & Custom Stain, Opaque & Primed Finish, Sealed Top & Bottom,
Custom Color Matching**

DOOR WEIGHT

Épaisseur: 1 3/4" (44 mm) 2.7lbs/ft2

WARRANTY

**Valide pour la durée de vie de l'installation d'origine, pour usage intérieur
seulement**

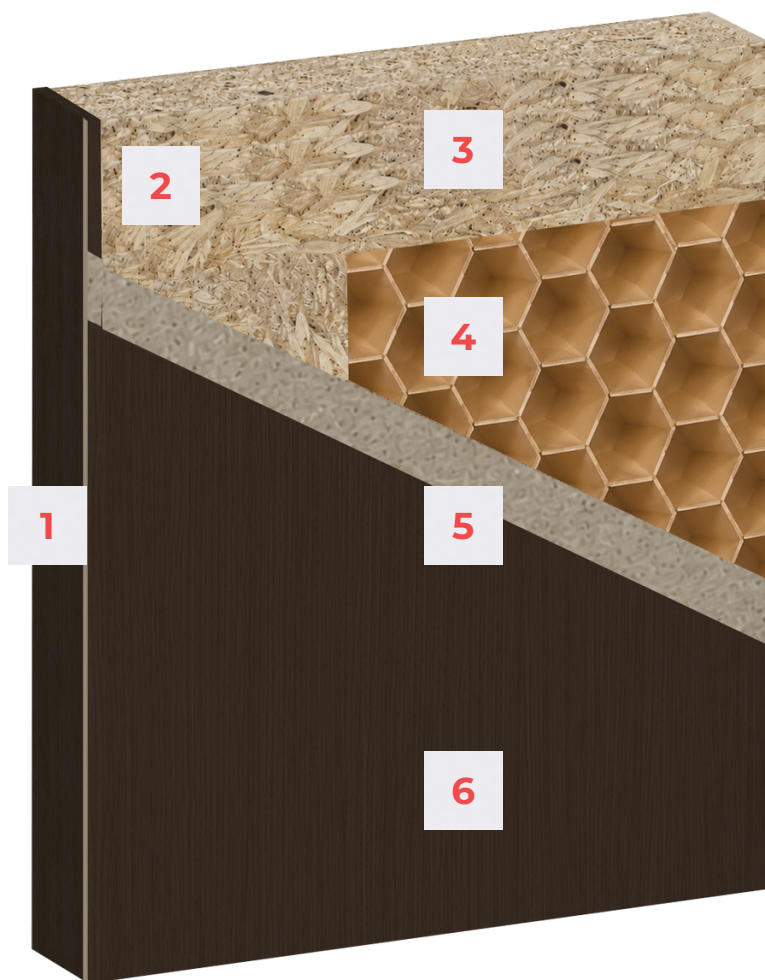

1	Montant 7/16"(11mm) de bois franc (Dimension Brute)	2	Montant Intérieur 4"(102mm) SCL
3	Traverse 3" (76mm) SCL	4	Âme creuse (au choix du manufacturier)
5	Pli transversale (HDF)	6	Placage

ADDITIONAL NOTE

Stiles and Rail dimensions shown are rough sizes, before trimming.

Blind edges also available.