


LAMBTON Doors ARCHITECTURAL WOOD DOORS AND FRAMES		NON-RATED		20 MINUTES Neutral Pressure		20 MINUTES Category A & B Positive Pressure		45 MINUTES Category A & B Positive Pressure	
MODELS		5-LSL-CE/ME/BE 5 UFLSL-ECE/EME/EBE 5 FSLSL-ECE/EME/EBE 5 LSL45 CE/ME/BE 5 UF-SCL45 ECE/EME/EBE 5 FSSCL45 ECE/EME/EBE							
DIMENSIONS		Thickness		1 3/8" to 2 1/4" 35 mm to 57 mm		1 3/4" to 2 1/4" 44 mm to 57 mm			
		Single Doors		48" x 120" 1219 mm x 3048 mm		20 min: 48" x 108" 1219 mm x 2743 mm 48" x 96" 1219 mm x 2438 mm			
		Standard Pairs Double egress Pairs		96" x 120" 2438 mm x 3048 mm		20 min: 96"x 108" 2438mm x 2742 mm 96" x 96" 2438 mm x 2438 mm			
CONSTRUCTION		Surface Material		Wood Veneer, MDO, HPDL					
		Crossbands		HDF					
		Vertical Edges (Stiles)		7/16" (11 mm) Hardwood Laminated to 1" (25 mm) Structural Composite Lumber (SCL)					
		Horizontal Edges (Rails)		1 7/16" (36 mm) Structural Composite Lumber (SCL)				1 7/16" (36 mm) Structural Composite Lumber (SCL)	
		Face and core assembly adhesive		Type 1 (waterproof); PVA (UF-Free)		Type 1 (waterproof); PVA (UF-Free)		Type 1 (waterproof); PVA (UF-Free)	
		Core Construction		Structural Composite Lumber (SCL) with a density of 38 PCF (609kg/m3)					
STC		Acoustic Rating							
CREDITS & STANDARD		Environmental Options		CDPH compliant, ULEF/NAF *Upon request FSC *Upon request					
		Environmental Product Declaration		Yes					
		Quality Standards		AWS-ED.2, NAAWS 4.0, WDMA Series I.S.1-A-2021, ASTM F476					
		WDMA Performance Duty Level		Extra Heavy Duty					
		Label Agency				ITS-WH			

LAMBTON Doors ARCHITECTURAL WOOD DOORS AND FRAMES		NON-RATED	20 MINUTES Neutral Pressure	20 MINUTES Category A & B Positive Pressure	45 MINUTES Category A & B Positive Pressure
OPTIONS	Lite openings / Louvers	Available with size limitations. (louvers not available in 20 min Fire Doors)			
	Distance from Cut out to Cut out Distance from Lock and Lite Cutouts	1 1/2" (38 mm)	5" (127 mm)		
	Machining	Machining preparation per hardware manufacturer's templates			
	Factory Finish	UV Finishing System 9 by AWI, No VOC Clear, Standard & Custom Stain, Opaque & Primed Finish, Sealed Top & Bottom, Custom Color Matching Lambton Doors' ASEPTI: antimicrobial coated surface in option			
DOOR WEIGHT		Thickness 1 3/4" (44 mm): 6,1lbs/ft2			
WARRANTY		Life of original installation, interior use only			

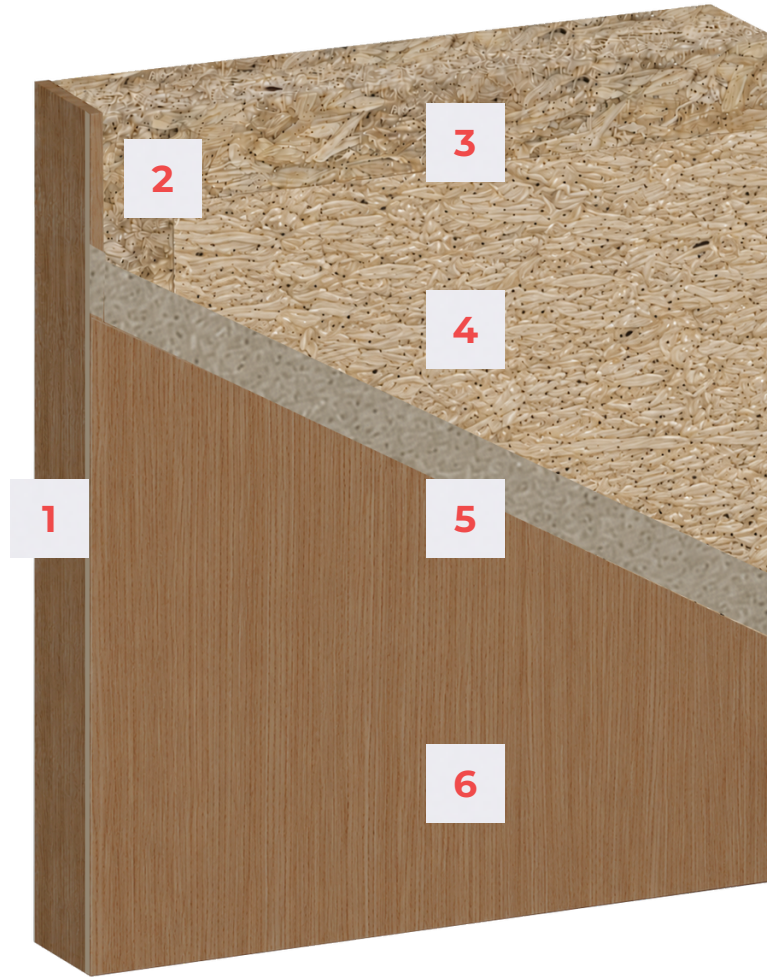

1	7/16" (11mm) of Hardwood edge (before Trim)	2	1" (25mm) SCL Inner stile
3	1 7/16" (36mm) SCL Rail	4	Core SCL
5	Cross band (HDF)	6	Wood Veneer

ADDITIONAL NOTE

Stiles and Rail dimensions shown are rough sizes, before trimming.

Blind edges also available.