

MODELS

Casing Free Rabbet Jamb CFRJ-00

DIMENSIONS

Minimum Wall Thickness

3 5/8" (92mm)

Maximum Opening Single

Single : 48" x 120" (1219mm x 3048mm)

Maximum Opening Pair

Pair: 96" x 120" (2438mm x 3048mm)

CONSTRUCTION

Core

Structural Composite Lumber (SCL/LSL)

Adhesive

Type I (waterproof); PVA (UF-Free)

Face

Wood veneer, MDO,HDF

Factory Finish

UV Finishing System 9by AWI. No VOC.
Stain,clearcoat,opaque and primed finish available.Custom ColorMatching
available. Lambton doors' ASEPTI: Antimicrobial coated surface in option.

Shipping and Wrapping

Knock down, Bundle Wrapped

OPTIONS

Assembly

Dado's pre-drilled and countersunk for No.9 Wood screws. (screws supplied by
others) Rabbet assembly. Miter assembly (45) also available on request.

Suggested Rough Opening
Dimensions

For single or pair doors
After finished floor:
Width: Interior opening of frame + 3 1/2" (89 mm)
Height: Interior opening of frame + 1 3/4" (44 mm)

WARRANTY



Life of original installation

ADDITIONAL NOTE

No Wood Casing required at installation with this jamb

Dimension on drawing are finished size

CFRJ Frame

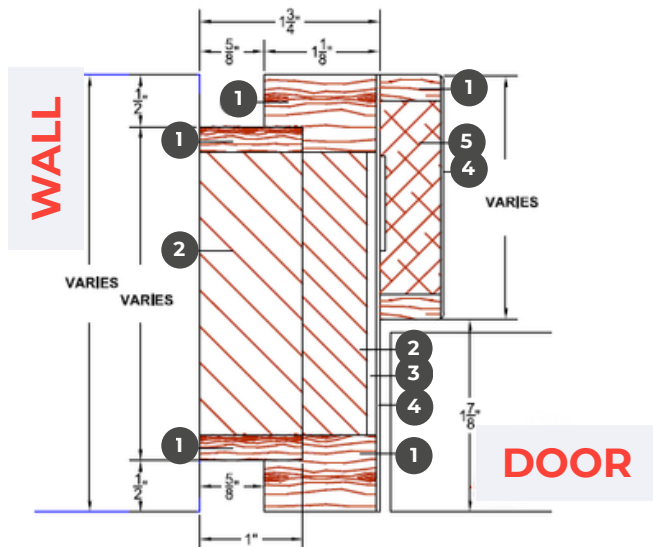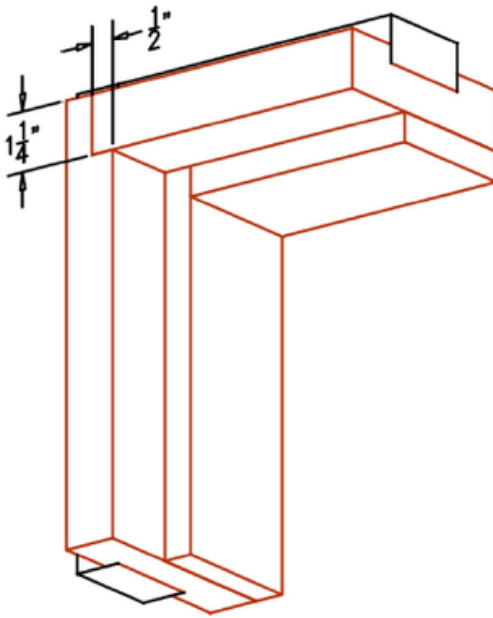

- 1 Wood
- 2 Structural Composite Lumber (SCL)
- 3 Crossband
- 4 Veneer
- 5 Medium Density Fiberboard (MDF)

