



MODELS
Rabetted-Jamb RJ-00
Rabetted-Jamb RJ-20
DIMENSIONS
**Minimum Wall
Thickness**
3 5/8" (92mm)
3 3/4" (95mm)
**Maximum Opening
Single**
48" x 120" (1219mm x 3048mm)
48" x 108" (1219mm x 2743mm)
Maximum Opening Pair
96" x 120" (2438mm x 3048mm)
96" x 108" (1219mm x 2743mm)
CONSTRUCTION
Core
Structural Composite Lumber (SCL/LSL)
Adhesive
Type 1 (waterproof); PVA (UF Free)
Face
Wood veneer, MDO or HDF
Factory Finish
**UV Finishing System 9 By AWI. No VOC Stain, Clearcoat, opaque and primed finish available. Custom color matching available
Lambton Doors' ASEPTI: Antimicrobial coated surface in option.**
Shipping and Wrapping
Knock Down , Bundle Wrapped
OPTIONS
Assembly
**Dado's pre-drilled and countersunk for no.8 wood screws. Screws by others.
Rabbet assembly. Miter assembly at 45 also available on request.**
**Suggested Rough
Opening Dimensions**
**After finished floor :
Width: Interior opening of frame +2 3/4" (70mm)
Height: Interior opening of frame +1 3/8" (35mm)**
WARRANTY
Life of original installation
ADDITIONAL NOTE
Wood Casing : Standard profiles available
TJ-20 : Min 5/16" x 1 5/8" (8mm x 41mm)
Dimension on drawing are finished size.

Rabbet Jamb (RJ) Frame

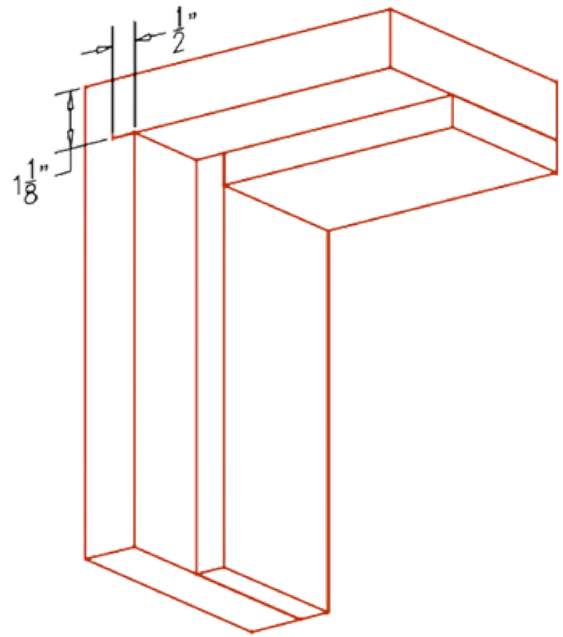

- 1 Wood
- 2 Structural Composite Lumber (SCL)
- 3 Crossband
- 4 Veneer
- 5 Medium Density Fiberboard (MDF)

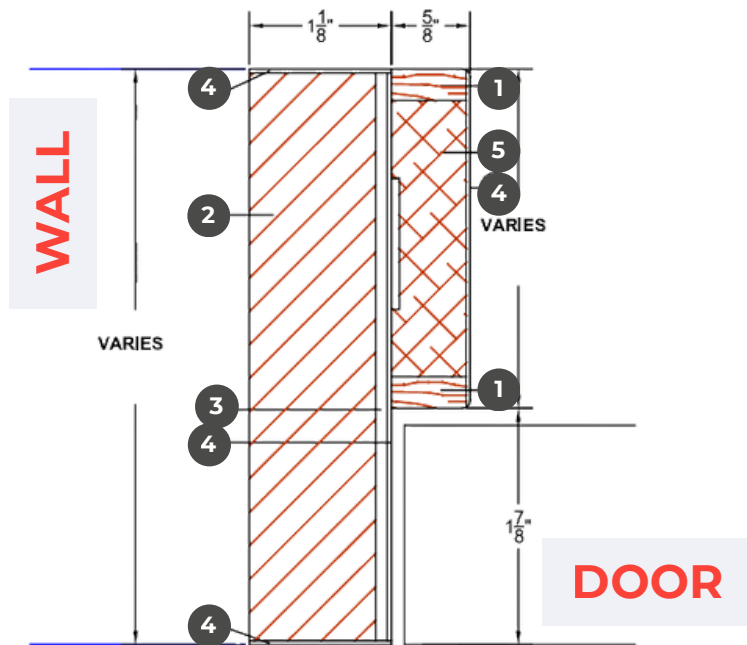