

MODELS

Rabatted-Jamb 45-60-90 min
RJ-45/60/90

Conforms for use with Category A or B Positive and Neutral pressure Firedoors

DIMENSIONS

**Minimum Wall
Thickness**

4 3/4" (121mm)

**Maximum Opening
Single**

42" x 108" (1067mm x 2743mm)

**Maximum Opening
Pair**

84" x 108" (2134mm x 2743mm)

CONSTRUCTION

Core

Fire Proof Composite Material (FPCM)

Adhesive

Type I (waterproof); PVA (UF-Free)

Face

Wood veneer ,MDO or HDF

Factory Finish

UV Finishing System⁹ by AWI. No VOC.
Stain, clearcoat, opaque and primed finish available. Custom color matching available. Lambton Doors' ASEPTI: Antimicrobial coated surface in option.

**Shipping and
Wrapping**

Knock Down, Bundle Wrapped

OPTIONS

Assembly

Dado's pre-drilled and countersunk for No.8 wood screw. Screws by others
Rabatted assembly. Miter assembly at 45 also available on request

**Suggested Rough
Opening Dimensions**

After finished floor :
Width: Interior opening of frame +2 3/4" (70mm)
Height: Interior opening of frame +1 3/8" (35mm)

WARRANTY

Life of original installation



ADDITIONAL NOTE

Wood Casing : Standard profiles available

Min 5/16" x 1 5/8" (8mm x 41mm)

Dimension on drawing are finished size.

Rabbet Jamb (RJ) Frame

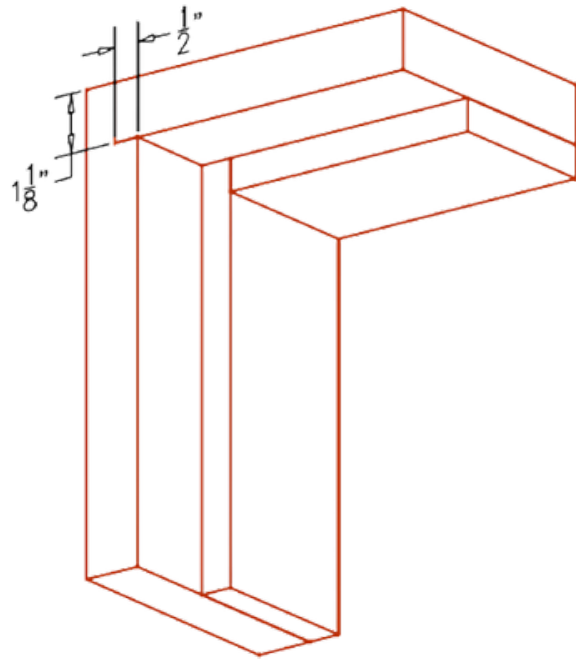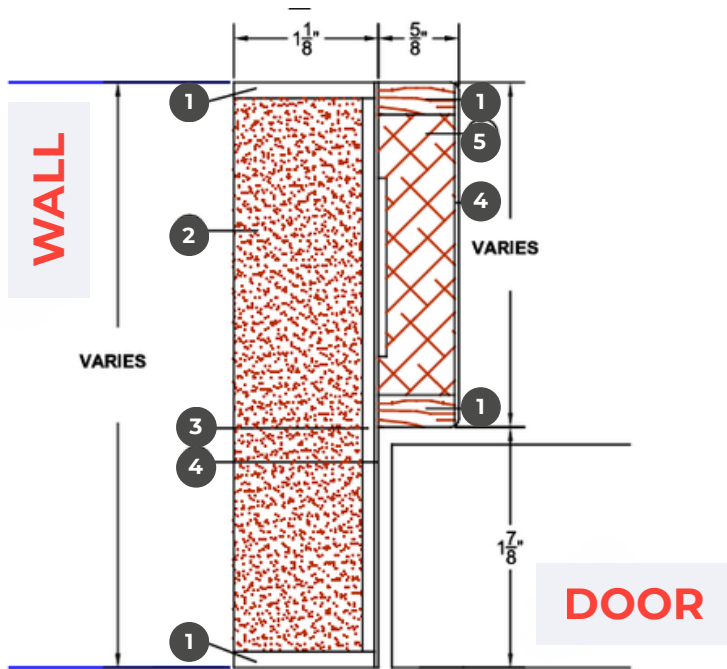

- 1 Wood
- 2 Fire Proof Composite Lumber (FPCM)
- 3 Crossband
- 4 Veneer
- 5 Medium Density Fiberboard (MDF)

