

MODELS

T-Jamb TJ-00

T-Jamb TJ-20

DIMENSIONS

Minimum Wall
Thickness

3 5/8" (92mm)

3 3/4" (95mm)

Maximum Opening
Single

48" x 120" (1219mm x 3048mm)

48" x 108" (1219mm x 2743mm)

Maximum Opening Pair

96" x 120" (2438mm x 3048mm)

96" x 108" (1219mm x 2743mm)

CONSTRUCTION

Core

Structural Composite Lumber (SCL/LSL)

Adhesive

Type 1 (waterproof); PVA (UF Free)

Face

Wood veneer, MDO or HDF

Factory Finish

UV Finishing System 9 By AWI. No VOC Stain, Clearcoat, opaque and primed finish available. Custom color matching available
Lambton Doors' ASEPTI: Antimicrobial coated surface in option.

Shipping and Wrapping

Knock Down , Bundle Wrapped

OPTIONS

Assembly

Dado's pre-drilled and countersunk for no.8 wood screws. Screws by others.
Rabbit assembly. Miter assembly at 45 also available on request.

Suggested Rough
Opening Dimensions

After finished floor :
Width: Interior opening of frame +2 3/4" (70mm)
Height: Interior opening of frame +1 3/8" (35mm)

WARRANTY

Life of original installation



ADDITIONAL NOTE

Wood Casing : Standard profiles available

TJ-20 : Min 5/16" x 1 5/8" (8mm x 41mm)

Dimension on drawing are finished size.

T Jamb (TJ) Frame

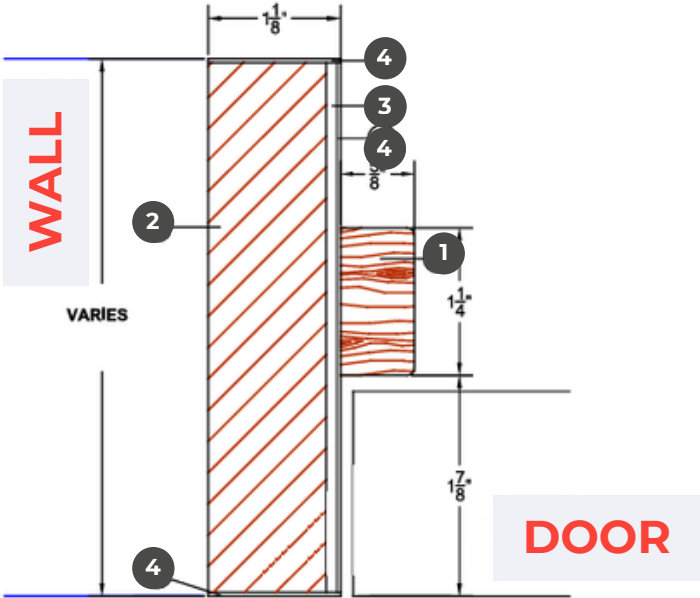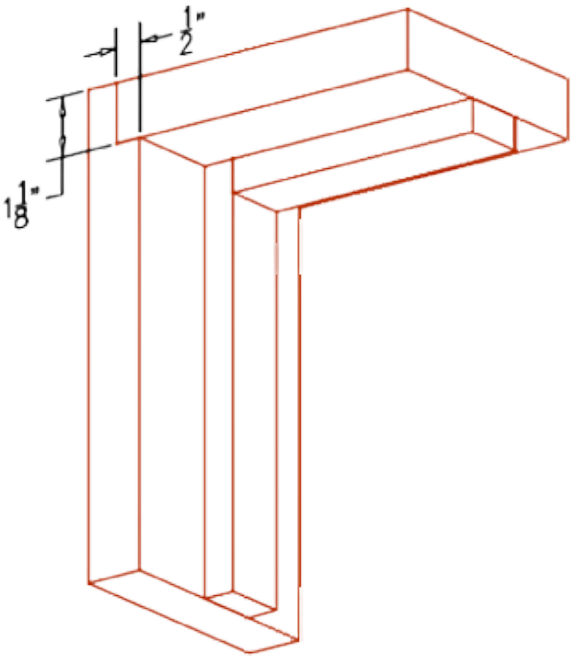

- 1 Wood
- 2 Structural Composite Lumber (SCL)
- 3 Crossband
- 4 Veneer

