LAMBTON Doors
ARCHITECTURAL WOOD DOORS AND FRAMES

NON-RATED


MODELS		Casing Free Jamb CFJ-00
DIMENSIONS	Minimum Wall Thickness	3 5/8'' (92mm)
	Maximum Opening Single	Single : 48'' x 120'' (1219mm x 3048mm)
	Maximum Opening Pair	Pair: 96'' x 120'' (2438mm x 3048mm)
CONSTRUCTION	Core	Structural Composite Lumber (SCL/LSL)
	Adhesive	Type I (waterproof); PVA (UF-Free)
	Face	Wood veneer, MDO,HDF
	Factory Finish	UV Finishing System 9by AWI. No VOC. Stain,clearcoat,opaque and primed finish available.Custom ColorMatching available. Lambton doors' ASEPTI: Antimicrobial coated surface in option.
	Shipping and Wrapping	Knock down, Bundle Wrapped
OPTIONS	Assembly	Dado's pre-drilled and countersunk for No.9 Wood screws. (screws supplied by others) Rabbet assembly. Miter assembly (45) also available on request.
	Suggested Rough Opening Dimensions	For single or pair doors After finished floor: Width: Interior opening of frame + 3 1/2" (89 mm) Height: Interior opening of frame + 1 3/4" (44 mm)
WARRANTY		Life of original installation


ADDITIONAL NOTE

No Wood Casing required at installation with this jamb

Dimension on drawing are finished size

CFJ Frame

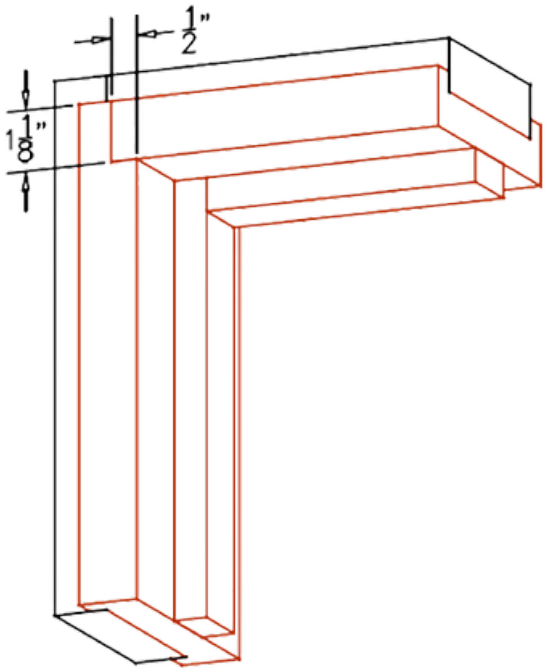

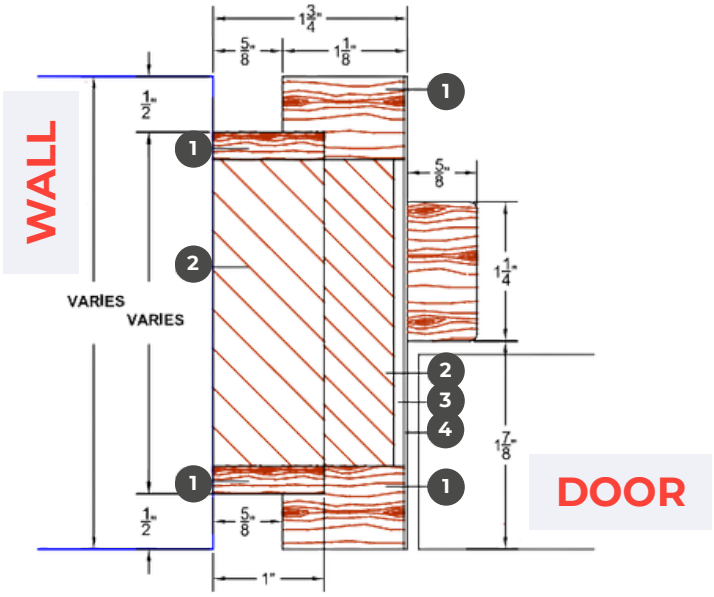

1. Wood
2. Structural Composite Lumber (SCL)
3. Crossband
4. Veneer

